



Fiber Optical Pigtail, LC, Simplex

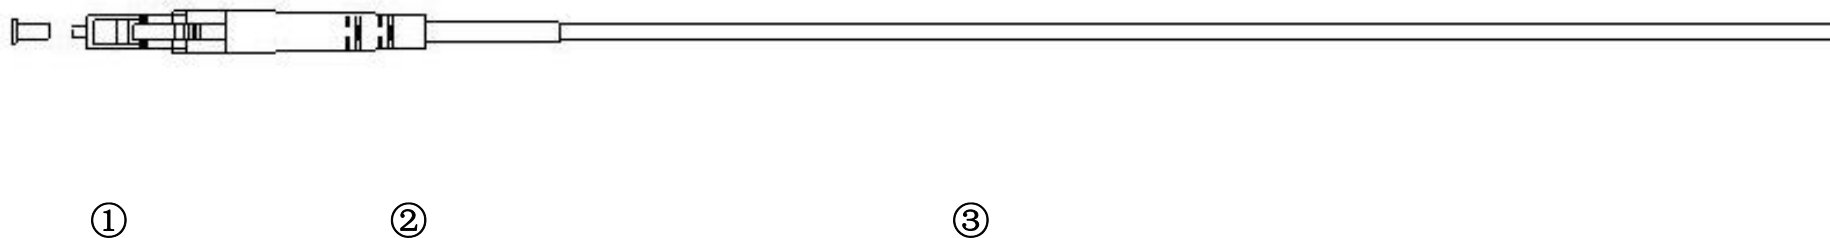

Feature:

- *Standard: Telcordia GR-326-CORE
- *UPC or APC polishing
- * Single mode fiber: 1310nm and 1550nm for G.652D, 1550nm and 1625nm for G.655C
- *Standard housing: ceramic ferrule
- *Cable diameter: 3.0mm or 2.0mm or 0.9mm or customized
- * Cladding diameter: 125 μ m, Coating diameter: 250 μ m
- * Fiber type: 9/125 μ m (OS1), or 62.5/125 μ m (OM1), or 50/125 μ m (OM2, OM3)
- *Insertion loss: SM Less than 0.25 dB
- *Return loss:
 - UPC SM larger than 50dB
 - APC SM larger than 60dB
- *Repeatability: Less than 0.2 dB
- *Changeability: Less than 0.1 dB
- *Operating temperature range: -20°C ~ 70°C
- *Storage temperature range: -40°C ~80°C
- *Tensile strength of the connector: 10N
- *Durability: 1000 mates
- *Min. bending radius: 20mm
- *Color of the jacket: SM yellow or white, OM1, OM2 orange, OM3 aqua, or customized
- *Material of the jacket: PVC or LSZH or customized, Label and packing can be customized

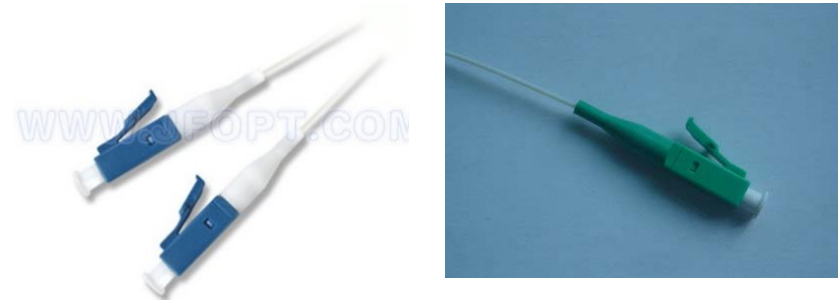

| Item | Description | Qty |
|------|-------------|-----|
| ① | T cap | 1 |
| ② | Boot | 1 |
| ③ | Fiber cable | 1 |